




SEE PLANS AND SPECIFICATIONS FOR SURFACE RESTORATION

WIDTH OF PERMANENT PAVEMENT REMOVAL AND REPLACEMENT FOR PAVEMENT


SEE PLANS AND SPECIFICATIONS FOR SURFACE RESTORATION

WIDTH OF PERMANENT PAVEMENT REMOVAL AND REPLACEMENT FOR PAVEMENT

MINIMUM COVER
12" FOR PIPE UP TO 48"
18" FOR PIPE GREATER THAN 48"
TRAFFICKED AREAS
MEASURED TO TOP OF SUBGRADE
GREEN AREAS
MEASURED TO TOP OF GROUND

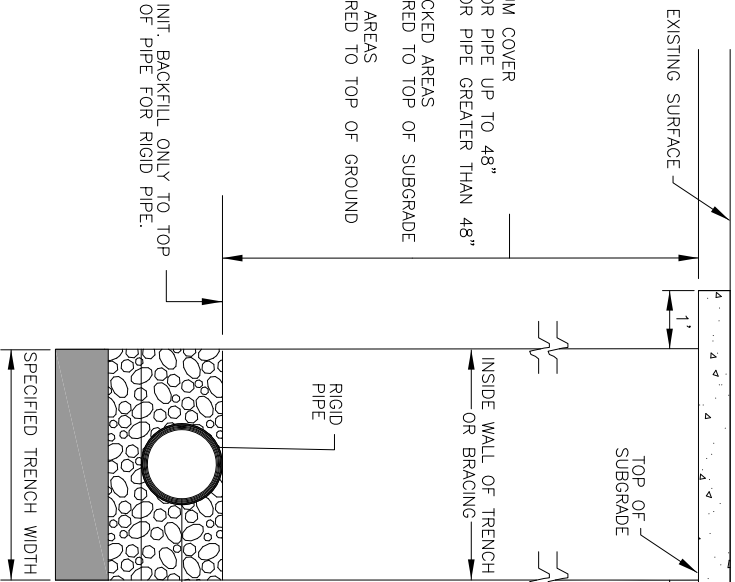

MINIMUM COVER
12" FOR PIPE UP TO 48"
18" FOR PIPE GREATER THAN 48"
TRAFFICKED AREAS
MEASURED TO TOP OF SUBGRADE
GREEN AREAS
MEASURED TO TOP OF GROUND

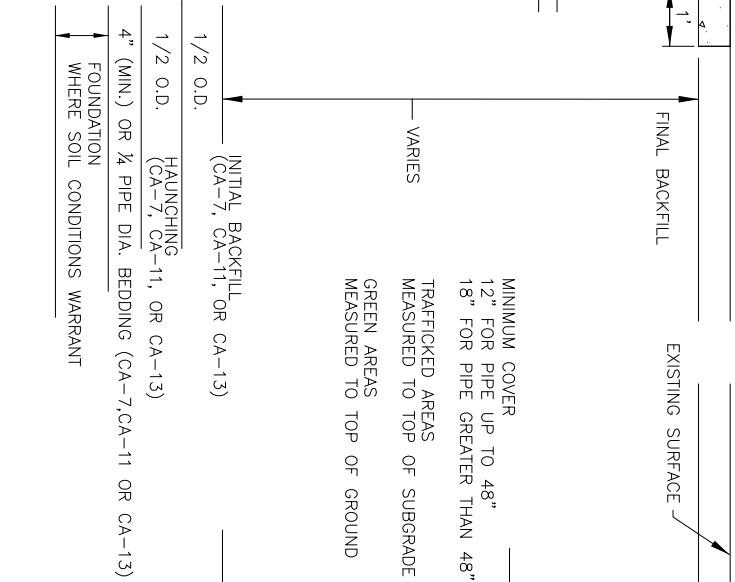

RIGID PIPE INSTALLATION DETAIL

FLEXIBLE PIPE INSTALLATION DETAIL

- NOTES:
1. FOR QUALIFIED SEWER CONSTRUCTION ONLY.
2. SHORING, OR EQUIVALENT PROTECTIVE SYSTEM, REQUIRED FOR TRENCHES OF 5' DEPTH OR GREATER, OR AS REQUIRED BY MUNICIPALITY.

NOT TO SCALE

TECHNICAL GUIDANCE MANUAL

11/25/25

RIGID AND FLEXIBLE PIPE INSTALLATION DETAIL

STD. DWG. NO. 34

PAGE NO. 35